




TRANSHOW INDUSTRY LIMITED

GAOYANG RD, ZHOUEAN VILLAGE, JIANGSHAN TOWN
 YINZHOU DISTRICT, NINGBO CITY, 315100 CHINA
 Tel: +86-574-8736.7873 Fax: +86-574-8736.4349
www.transhow.net Email: transhow@transhow.net

DIN 6921 HEX FLANGE BOLTS

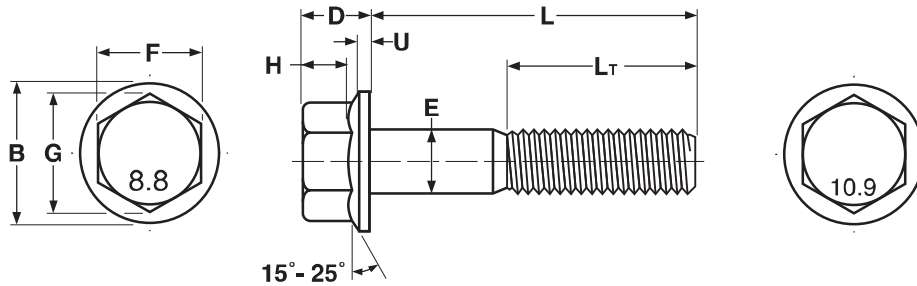

Dimensions Guide, all dimensions in mm											
Nominal Size	Thread Pitch	E		F		G	D	H	U	B	
		Body Diameter		Width Across Flats		Width Across Corners	Total Head Height	Wrenching Height	Flange Edge Thickness	Flange Diameter	
		Max	Min	Max	Min	Min	Max	Min	Min	Max	Min
M6	1	6	5.82	10	9.78	10.95	6.6	2.6	1.1	14.2	12.2
M8	1.25	8	7.78	13	12.73	14.26	8.1	3.2	1.2	18	16.8
M10	1.5	10	9.78	15	14.73	16.5	9.2	3.6	1.5	22.3	19.6
M12	1.75	12	11.73	16	15.73	17.62	11.5	4.6	1.8	28.6	23.8
Tolerance on Length		12 thru 16mm: ±0.35mm		20mm thru 30mm: ±0.42mm		35 thru 50mm: ±0.5 mm					
		55 thru 80 mm: ±0.6 mm		90 thru 120 mm: ±0.7 mm		130 thru 180 mm: ±0.8 mm					